


W TYPE LONG PITCH STRAIGHT LINKPLATE CONVEYOR CHAINS

CONVEYOR CHAIN SERIES

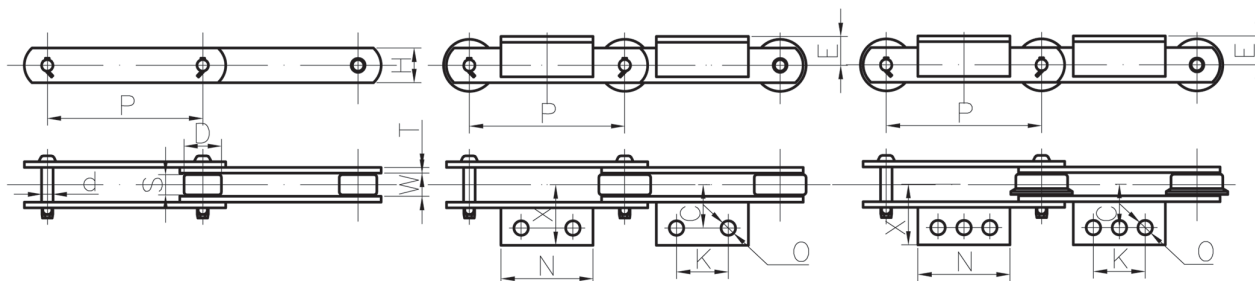

W type

With A-2 Type Weided Attachment

With A-3 Type Weided Attachment

A-2 TYPE WELDED WING ATTACHMENT

Chain No.	Pitch	Inner width	Roller			Plate		Pin		Attachment dimension							Ultimate tensile strength KN
			S	R	F	Height	Thick	Dia.	Length	E	C	X	K	N	O		
			D	D	D	H	T	d	L								
W25300-S.R.F	300	51.4	40.1	80	80	50.8	10	19.1	111.5	45	75	110.5	180	220	15	250	
W28300-S.R.F	300	57.2	44.5	100	100	63.5	10	22.2	121	55	80	123.5	180	220	15	285	
W28450-S.R.F	450												280	320			
W48300-S.R.F	300	66.7	50.8	125	125	76.2	12.7	25.4	145	70	100	160	100	160	19	485	
W48450-S.R.F	450												280	330			
W48600-S.R.F	600												360	410			
W51300-S.R.F	300	77	67.2	140	140	76.2	16	31.8	175.5	80	120	171.4	100	160	24	510	
W51450-S.R.F	450												280	330			
W51600-S.R.F	600												360	410			
W55300-R.F	300	77	70	140	140	90	12.7	35	160.5	90	115	165	110	170	24	550	
W55350-R.F	350												160	220			
W55400-R.F	400												200	260			
W80350-R.F	350	88	85	170	170	110	16	42	189.5	100	140	210	100	180	28	805	
W80400-R.F	400												150	230			
W80500-R.F	500												260	340			
W113400-R.F	400	100	100	200	200	130	19	50	218.5	120	150	220	120	200	28	1130	
W113600-R.F	600												320	400			

A-3 TYPE WELDED WING ATTACHMENT

Chain No.	Pitch	Inner width	Roller			Plate		Pin		Attachment dimension							Ultimate tensile strength KN
			S	R	F	Height	Thick	Dia.	Length	E	C	X	K	N	O		
			D	D	D	H	T	d	L								
W28450-S.R.F	450	57.2	44.5	100	100	63.5	10	22.2	121	55	80	123.5	140	320	15	285	
W48450-S.R.F	450	66.7	50.8	125	125	76.2	12.7	25.4	145	70	100	160	140	330	19	485	
W48600-S.R.F	600												180	410			
W51450-R.F	450	77	67.2	140	140	76.2	16	31.8	175.5	80	120	171.4	140	330	24	510	
W51600-R.F	600												180	410			
W55350-R.F	350	77	70	140	140	90	12.7	35	160.5	90	115	165	80	220	24	550	
W55400-R.F	400												100	260			
W80500-R.F	500	88	85	170	170	110	16	42	189.5	100	140	210	130	340	28	805	
W113600-R.F	600	100	100	200	200	130	19	50	218.5	220	150	220	160	400	28	1130	