



HOLLOW PIN CHAINS

CONVEYOR CHAIN SERIES

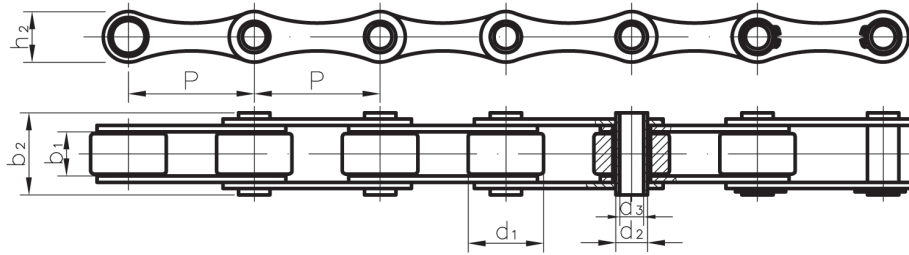

Chain No.	Pitch	Roller dia.	Inside Width	Pin body dia.	Pin inside dia.	Pin length	Inner plate depth	Ultimate tensile strength
	P	d1(max)	b1(min)	d2(max)	d3(min)	b2(max)	h2(max)	Q
	mm	mm	mm	mm	mm	mm	mm	KN
C2052HP	31.75	19.05	9.40	7.06	5.13	20.50	15.00	10.60
1201/205PF	50.00	25.00	12.00	8.35	6.30	26.5	20.00	31.36
C2120HP	76.20	31.75	15.20	13.50	8.30	58.0	28.00	59.20
250HP	250.00	65.00	36.50	21.5	15.95	78.9	45.00	186.20
A08D1	50.80	31.75	15.24	13.97	9.65	37.0	26.16	27.00
A10D1	63.50	31.75	15.24	13.97	9.65	37.0	26.16	26.68
A12D1	76.20	31.75	15.24	13.97	9.65	37.0	26.16	26.68
A24D1	152.40	31.75	15.24	13.97	9.65	37.0	26.16	27.00
HC240040	101.60	66.70	25.40	26.92	19.56	57.2	50.80	190.00
HC120040	101.60	47.60	19.10	19.05	13.25	43.4	38.10	100.00
HC240060	152.40	66.70	25.40	26.92	19.56	57.2	50.80	190.00
HC120060	152.40	47.60	19.10	19.05	13.25	43.4	38.10	100.00

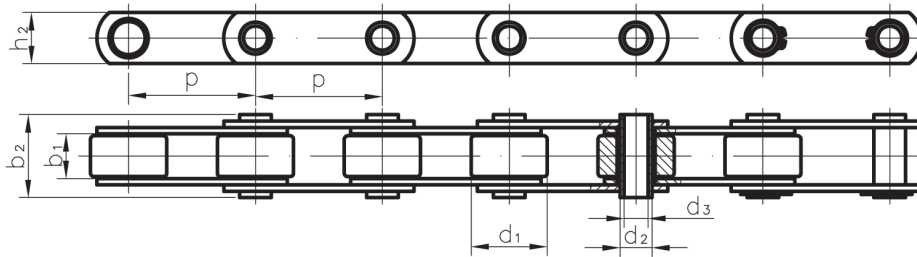

Chain No.	Pitch	Roller dia.	Inside Width	Pin body dia.	Pin inside dia.	Pin length	Inner plate depth	Ultimate tensile strength
	P	d1(max)	b1(min)	d2(max)	d3(min)	b2(max)	h2(max)	Q
	mm	mm	mm	mm	mm	mm	mm	KN
1.1260	41.75	17.00	20.50	11.10	8.35	36.5	21.40	27.00
3124/50PF	50.00	31.00	15.00	13.35	10.50	36.5	25.00	40.18